


FlexPay 6 Modular 15 in. (M1-15) Outdoor Payment Terminal

The ultimate customer engagement experience: interactive touchscreen with high-definition rich media & video.

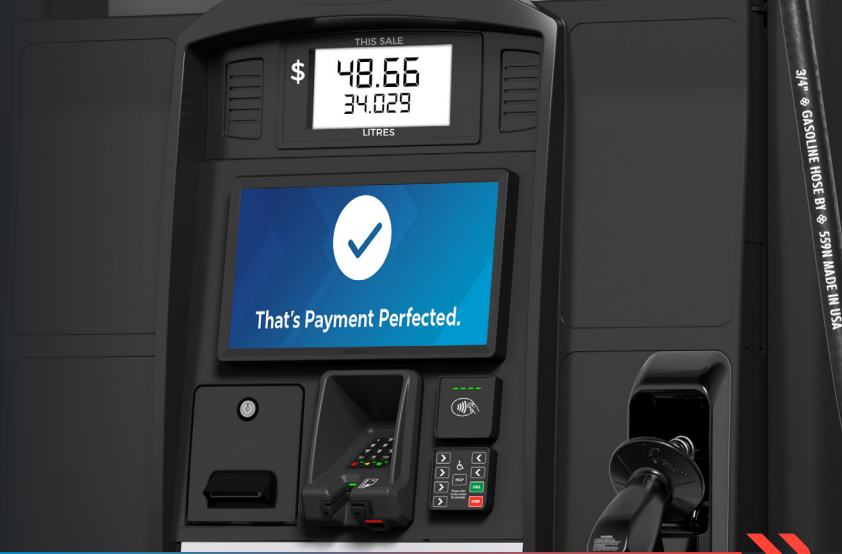

The Invenco® by GVR FlexPay 6 Modular 15 in. OPT is PCI 5.x with SRED compliant (PCI 6.x coming soon) and provides flexibility and maximizes customer engagement. This payment terminal comes with a rich-media touchscreen and an open platform suited to any self-service or unattended payment environment.

KEY BENEFITS

- Easily highlight your brand with Engage Media and Engage Prompt
- Drive promotions and engagement with larger screens
- Take control by building your own applications
- Maximize uptime with cloud-connectivity
- Plug in P2PE architecture provides solutions from major providers
- Operates in extreme weather environments

KEY FEATURES

- 15 in. HD color touchscreen
- EMV 3.x Contactless and 2D barcode scanner are standard
- 1D/2D barcode reader
- Compatible with other POS systems, dispensers and applications
- Open API for third party app development
- Wide range of retrofit options
- Hybrid card reader

FlexPay 6 M1-15 Specifications

Contactless Reader	<ul style="list-style-type: none"> ▪ EMV – NFC – ISO14443 A&B – ▪ ISO18092 capable 	Security & Compliance	<ul style="list-style-type: none"> ▪ PPCI-PTS v5.1 including SRED (pending PCI 6 release) ▪ UL Class 1 Div 2, FCC CE ▪ EMV Level 1 and 2 contact and contact-less ▪ Support for major contactless schemes (card/NFC)
Optional Modules	<ul style="list-style-type: none"> ▪ 80 mm. Thermal Printer ▪ Support for legacy printers 	Display	<ul style="list-style-type: none"> ▪ Full color industrial touch screen ▪ 15 in. screen ▪ Video: 30 fps
Peripheral Connectivity	<ul style="list-style-type: none"> ▪ 3x USB 2.0, 1x RS-232, 1x RS-485, 4x GPIO, 1x Ethernet ▪ 2x stereo speaker outs 	Card Reader	<ul style="list-style-type: none"> ▪ Hybrid 3-track MSR + EMV chip
Processors	<ul style="list-style-type: none"> ▪ Dual-core processor 	Keypad	<ul style="list-style-type: none"> ▪ 15 durable backlit keys – IP65 rating
Application Memory	<ul style="list-style-type: none"> ▪ 4GB Flash, 1 GB RAM 		
Operating Temperature (powered)	<ul style="list-style-type: none"> ▪ -25° CC to +70° C (heating and cooling options available for extreme climates) CC 		